

PILLOW BLOCK BALL BEARING UNITS

UCP2
(NORMAL DUTY)



SL TYPE SEAL,






L3 TYPE SEAL

DOUBLE PROTECTION METHOD (STAMPED STEEL COVER)

UCP2-C... WITH COVER, BOTH SIDES OPEN

UCP2-CD... WITH COVER, ONE SIDE CLOSED

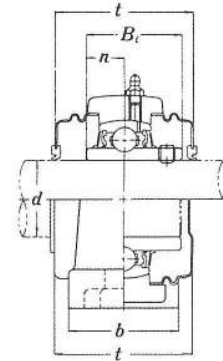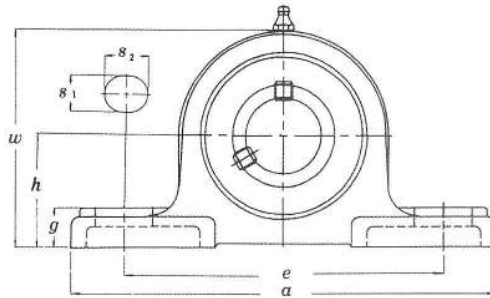

Unit No.	Shaft Dia.		Dimensions (in./mm)										Bolt Used		Bearing No.	Housing No.	Weight (kgf)	
	d (in.)	d (mm)	h	a	e	b	S ₂	S ₁	g	w	t	Bi	n	(mm)				(in.)
UCP 201-8 202-10-203	1/2	12	13/16	5	33/4	1 1/2	3/4	1/2	19/32	23/8	123/32	1.2205	0.5000	10	3/8	UC 201-8 202-10-203	P 203	0.63 0.61 0.60
	5/8	15	30.2	127	95	38	19	13	15	60	44	31.0	12.7					
	5/8	17																
UCP 204-12-204	3/4	20	15/16	5	33/4	1 1/2	3/4	1/2	19/32	217/32	123/32	1.2205	0.5000	10	3/8	UC 204-12-204	P 204	0.66
	3/4	20	33.3	127	95	38	19	13	15	64	44	31.0	12.7					
UCP 205-14-205-15-205-16	7/8	25	17/16	5 1/2	4 1/8	1 1/2	3/4	1/2	5/8	225/32	17/8	1.3425	0.5630	10	3/8	UC 205-14-205-15-205-16	P 205	0.8
	15/16		36.5	140	105	38	19	13	16	71	48	34.1	14.3					
	1		36.5	140	105	38	19	13	16	71	48	34.1	14.3					
UCP 206-18-206-19	1 1/8	30	11 1/16	6 1/2	4 3/4	1 7/8	13/16	21/32	23/32	35/16	21/16	1.5000	0.6260	14	1/2	UC 206-18-206-19	P 206	1.3
	1 3/16		42.9	165	121	48	21	17	18	84	52	38.1	15.9					
UCP 207-20-207-21-207-22-207-23	1 1/4	35	1 7/8	6 9/16	5	1 7/8	13/16	21/32	3/4	32 1/32	25/16	1.6890	0.6890	14	1/2	UC 207-20-207-21-207-22-207-23	P 207	1.6
	1 5/16		47.6	167	127	48	21	17	19	93	59	42.9	17.5					
	1 3/8		47.6	167	127	48	21	17	19	93	59	42.9	17.5					
	1 7/16		47.6	167	127	48	21	17	19	93	59	42.9	17.5					
UCP 208-24-208-25-208	1 1/2	40	11 5/16	7 1/4	5 13/32	2 1/8	13/16	21/32	3/4	32 7/32	2 11/16	1.9370	0.7480	14	1/2	UC 208-24-208-25-208	P 208	2.0
	1 9/16		49.2	184	137	54	21	17	19	98	68	49.2	19.0					
UCP 209-26-209-27-209-28-209	1 5/8	45	2 1/8	7 15/32	5 3/4	2 1/8	13/16	21/32	25/32	43/16	2 11/16	1.9370	0.7480	14	1/2	UC 209-26-209-27-209-28-209	P 209	2.2
	1 11/16		54.0	190	146	54	21	17	20	106	68	49.2	19.0					
UCP 210-30-210-31-210-32	1 7/8	50	2 1/4	8 1/8	6 1/4	2 3/8	7/8	25/32	7/8	4 7/16	2 7/8	2.0315	0.7480	16	5/8	UC 210-30-210-31-210-32	P 210	2.9
	1 15/16		57.2	206	159	60	22	20	22	113	73	51.6	19.0					
UCP 211-32-211-34-211-35	2	55	2 1/2	8 5/8	6 23/32	2 3/8	7/8	25/32	7/8	4 29/32	2 15/16	2.1890	0.8740	16	5/8	UC 211-32-211-34-211-35	P 211	3.6
	2 1/8		63.5	219	171	60	22	20	22	125	75	55.6	22.2					
	2 3/16		63.5	219	171	60	22	20	22	125	75	55.6	22.2					
UCP 212-36-212-38-212-39	2 1/4	60	2 3/4	9 1/2	7 1/4	2 3/4	1	25/32	1	5 7/16	3 15/32	2.5630	1.0000	16	5/8	UC 212-36-212-38-212-39	P 212	4.9
	2 3/8		69.8	241	184	70	25	20	25	138	88	65.1	25.4					
	2 7/16		69.8	241	184	70	25	20	25	138	88	65.1	25.4					
UCP 213-40-213	2 1/2	65	3	10 7/16	8	2 3/4	13/16	1	1 1/16	5 29/32	3 15/32	2.5630	1.0000	20	3/4	UC 213-40-213	P 213	5.9
	2 1/2		76.2	265	203	70	30	25	27	150	88	65.1	25.4					
UCP 214-44-214	2 3/4	70	3 3/8	10 5/32	8 9/32	2 27/32	13/16	1	1 1/16	6 5/32	3 27/32	2.9370	1.1890	20	3/4	UC 214-44-214	P 214	6.8
	2 3/4		79.4	266	210	72	30	25	27	156	98	74.6	30.2					
UCP 215-48	3	75	3 3/4	10 13/16	8 17/32	2 29/32	13/16	1	1 3/32	6 3/8	3 27/32	3.0630	1.3110	20	3/4	UC 215-48	P 215	7.4
	3		82.6	275	217	74	30	25	28	162	98	77.8	33.3					
UCP 216	3 1/2	80	3 1/2	11 1/2	9 1/8	3 1/16	13/8	1	1 1/4	6 27/32	4 1/4	3.2520	1.3110	20	3/4	UC 216	P 216	9.0
	3 1/2		88.9	292	232	78	35	25	32	174	108	82.6	33.3					
UCP 217-52-217	3 1/4	85	3 3/4	12 7/32	9 23/32	3 9/32	1 9/16	1	1 1/4	7 9/32	4 13/32	3.3740	1.3425	20	3/4	UC 217-52-217	P 217	10.8
	3 1/4		95.2	310	247	83	40	25	32	185	112	85.7	34.1					
UCP 218-56-218	3 1/2	90	4	12 7/8	10 5/16	3 15/32	1 25/32	1 1/16	1 11/32	7 25/32	4 13/16	3.7795	1.5630	22	7/8	UC 218-56-218	P 218	13.9
	3 1/2		101.6	327	262	88	45	27	34	198	122	96.0	39.7					