



# Spherical Roller Thrust Bearings



Bore Diameter: 140~240mm

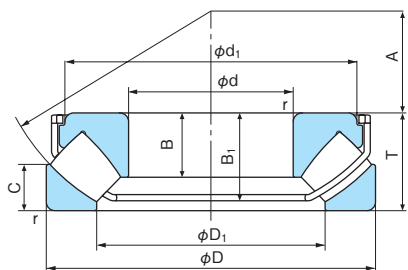

Type EX

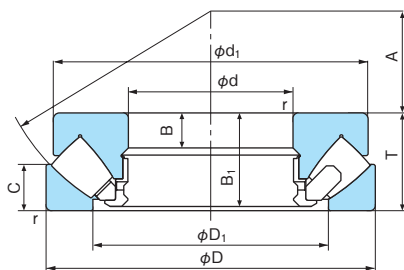

Type E

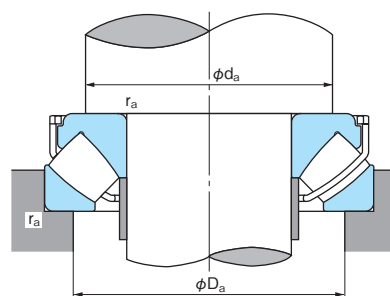

**Dynamic equivalent axial load**  
 $P_a = Fa + 1.2Fr$   
**Static equivalent axial load**  
 $P_{0a} = Fa + 2.7Fr$   
 where,  $F_a$ : Axial load  
 $F_r$ : Radial load  
 $\frac{Fr}{Fa} \leq 0.55$   
 However  $\frac{Fr}{Fa} \leq 0.55$  must be satisfied

1N=0.102kgf

Boundary dimensions (mm)				Bearing No.	Basic dynamic load rating $C_a$ (N)	Basic static load rating $C_{0a}$ (N)	Limiting speed (min <sup>-1</sup> )			Reference Dimensions (mm)						Abutment and fillet dimensions (mm)			Spacer dimensions (mm)		Mass (kg) (Reference)	Bearing No.
d	D	T	r (min)				Grease lubrication	Oil lubrication		$d_1$	$D_1$	B	$B_1$	C	A	$d_a$ (min)	$D_a$ (max)	$r_a$ (max)	$d_{b1}$ (max)	$d_{b2}$ (max)		
140	240	60	2.1	29328E	700000	2560000	—	1600		230	183	20	57	29	82	185	205	2.0	—	—	11.2	29328E
	240	60	2.1	29328EX	860000	2840000	950	1600		218.4	179	38.5	54.8	29	82	185	205	2.0	147.5	149.0	10.5	29328EX
	280	85	4	29428E	1200000	4050000	—	1200		268	199	31	81	41	86	205	235	3.0	—	—	24.6	29428E
	280	85	4	29428EX	1410000	4350000	850	1200		246	196	53.6	74.4	41	86	205	235	3.0	153.0	160.0	22.8	29428EX
150	215	39	1.5	29230E	335000	1390000	—	2100		208	178	14	37	19	82	179	196	1.5	—	—	4.60	29230E
	250	60	2.1	29330E	735000	2840000	—	1600		240	194	20	57	29	87	195	215	2.0	—	—	11.7	29330E
	300	90	4	29430E	1330000	4600000	—	1100		285	214	32	86	44	92	220	250	3.0	—	—	29.6	29430E
	300	90	4	29430EX	1630000	5150000	800	1100		265.4	207.5	58.5	80.8	44	92	220	250	3.0	163.0	169.0	27.8	29430EX
160	225	39	1.5	29232E	345000	1470000	—	2100		219	188	14	37	19	85	189	206	1.5	—	—	4.70	29232E
	270	67	3	29332E	880000	3400000	—	1400		260	208	23	64	32	92	210	235	2.5	—	—	15.5	29332E
	270	67	3	29332EX	1040000	3500000	850	1400		243.4	199.8	44	61.4	32	92	210	235	2.5	166.0	174.0	14.5	29332EX
	320	95	5	29432E	1510000	5350000	—	1000		306	229	34	91	45	99	230	265	4.0	—	—	35.9	29432E
	320	95	5	29432EX	1820000	5750000	750	1000		283.8	222	62.5	85.7	45	99	230	265	4.0	174.5	181.0	33.4	29432EX
170	240	42	1.5	29234E	390000	1700000	—	1900		233	198	15	40	20	92	201	218	1.5	—	—	6.00	29234E
	280	67	3	29334E	900000	3550000	—	1400		270	216	23	64	32	96	220	245	2.5	—	—	16.3	29334E
	340	103	5	29434E	1670000	5900000	—	950		324	243	37	99	50	104	245	285	4.0	—	—	44.0	29434E
180	250	42	1.5	29236E	420000	1900000	—	1900		243	208	15	40	21	95	211	228	1.5	—	—	6.30	29236E
	300	73	3	29336E	1020000	3950000	—	1300		290	232	25	69	35	103	235	260	2.5	—	—	20.7	29336E
	360	109	5	29436E	1950000	7000000	—	860		342	255	39	105	52	110	260	300	4.0	—	—	52.2	29436E
190	270	48	2	29238E	540000	2300000	—	1800		262	223	15	45	24	104	225	245	2.0	—	—	8.50	29238E
	320	78	4	29338E	1170000	4550000	—	1100		308	246	27	74	38	110	250	275	3.0	—	—	25.5	29338E
	380	115	5	29438E	2120000	7750000	—	800		360	271	41	111	55	117	275	320	4.0	—	—	61.4	29438E
200	280	48	2	29240E	550000	2410000	—	1800		271	236	15	45	24	108	235	255	2.0	—	—	9.08	29240E
	340	85	4	29340E	1350000	5250000	—	1000		325	261	29	81	41	116	265	295	3.0	—	—	32.0	29340E
	400	122	5	29440E	2350000	8450000	—	740		380	286	43	117	59	122	290	335	4.0	—	—	73.0	29440E
220	300	48	2	29244E	595000	2750000	—	1600		292	254	15	45	24	117	260	275	2.0	—	—	9.84	29244E
	360	85	4	29344E	1410000	5750000	—	1000		345	280	29	81	41	125	285	315	3.0	—	—	34.5	29344E
	420	122	6	29444E	2410000	8950000	—	720		400	308	43	117	58	132	310	355	5.0	—	—	74.2	29444E
240	340	60	2.1	29248E	890000	4000000	—	1300		330	283	19	57	30	130	285	305	2.0	—	—	17.1	29248E
	380	85	4	29348E	1410000	5850000	—	980		365	300	29	81	41	135	300	330	3.0	—	—	36.3	29348E
	440	122	6	29448E	2480000	9450000	—	720		420	326	43	117	59	142	330	375	5.0	—	—	83.0	29448E

Note: For heavy load application,  $d_a$  should be large enough to support the shaft washer rib.