


Double Row Angular Contact Ball Bearing

SL 5204/16.25-2T

Double Row Angular Contact Ball Bearing
Seeding Machine

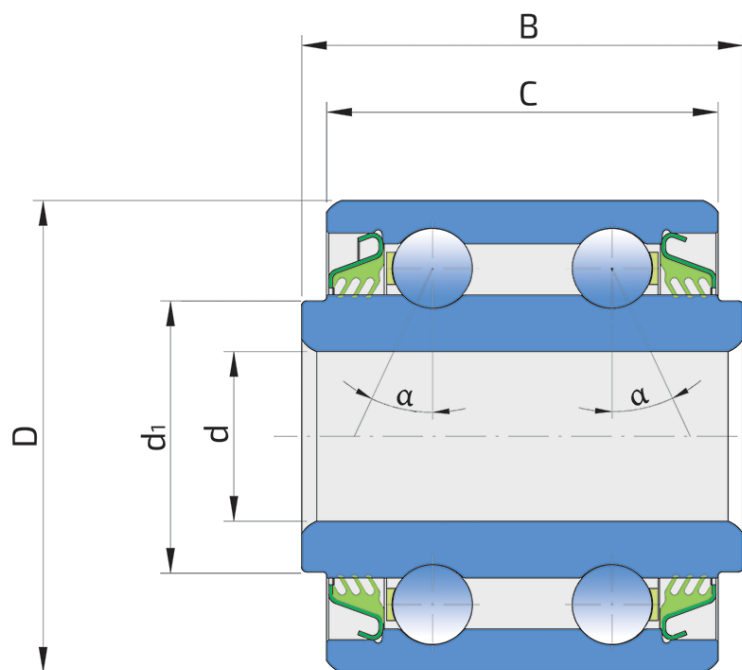

Technical Specification

| | | |
|------------------|--------------------------------|----------|
| C _{dyn} | Dynamic load rating | 18.8 kN |
| C _o | Static load rating | 12.6 kN |
| D | Outside diameter | 47 mm |
| d | Bore diameter | 16.25 mm |
| d ₁ | Inner ring outside diameter | 27 mm |
| C | D-shape hole cut out dimension | 39 mm |
| kg | Mass | 0.326 kg |
| B | Width inner ring | 44 mm |
| α | Contact angle | 25 ° |

Sealing

T SEAL / T SEAL (2T)

3-lip seal on the both side of the bearing, provides equal protection against contamination. Recommended for application where the possibility of contamination is the same on the both side.

